
Dualsun

Datasheet PVT- source Heat-Pump solar station

Technical specifications

- Mixing valve ESBE VRG 332
- Controler : ESBE CRA211 REGULATOR 230V 6NM
- Manometer : 0 - 10 bar
- Safety valve 6 bars (¾" M)
- Filling and draining valve (¾" M)
- Expansion vessel fitting ¾" M (not supplied)
- 2 isolation valve 1"¼ M
- 1 isolation valve 1"¼ F
- 1 filter valve 1"¼ M
- Copper piping

Image

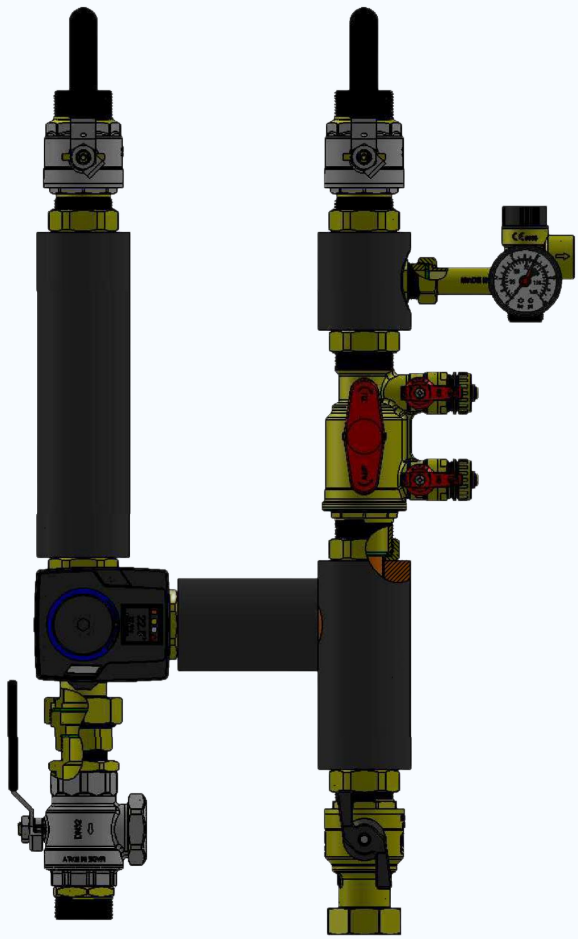

Dimensions

- 1"¼ inlet / outlet fitting (3M, 1F)
- Copper pipping 26/28
- Center distance 200mm
- Overall dimensions 595 mm x 380 mm x 150cm
- Wall mounting not supplied
- Insulation against condensation to be completed.

Pressure Loss (0°C)

